



# ORION II 1500, 930 (BBBL), MEDIUM, BLACK

ITAB

- ✓ Soffitto discreto e pulito
- ✓ Illuminazione orientabile fino a 30° in qualsiasi direzione
- ✓ Disponibile in bianco, nero e grigio

## TECHNICAL SPECIFICATION

|                           |                       |
|---------------------------|-----------------------|
| Product Code              | 300-522-20            |
| Colour                    | Black                 |
| Control                   | On/off                |
| CRI light colour          | 930 (BBBL)            |
| Delivered lumen output lm | 2 x 1400              |
| Driver                    | Stand alone, included |
| EEL                       | E                     |
| Light distribution        | Medium                |
| Lightsouce                | LED COB               |
| Mains input voltage       | 220-240 V             |
| Measurements A            | 280                   |
| Measurements B            | 158                   |
| Measurements C            | 103                   |
| Mounting                  | Recessed              |
| Position                  | 360°/30°              |
| Lifetime                  | L80 B10, 50.000h      |
| Protection                | IP 20, class III      |
| Sawing instructions x     | 272                   |
| Sawing instructions y     | 150                   |
| Start Time                | Instant               |
| System power W            | 2 x 12                |
| Unit                      | mm                    |
| Weight                    | 1,5                   |

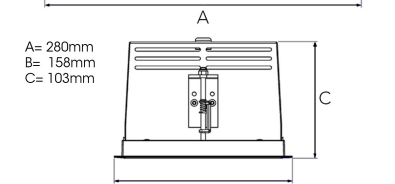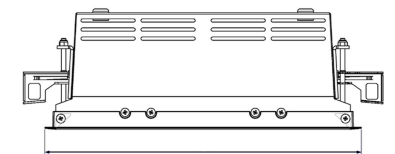

| Spot | Medium | Flood | Wide Flood |
|------|--------|-------|------------|
| 16°  | 28°    | 40°   | 65°        |
| m    | m      | m     | m          |
| 1.0  | 1.0    | 1.0   | 1.0        |
| 2.0  | 2.0    | 2.0   | 2.0        |
| 3.0  | 3.0    | 3.0   | 3.0        |
| 0.28 | 0.50   | 0.73  | 1.28       |
| 0.56 | 1.00   | 1.46  | 2.56       |
| 0.83 | 1.51   | 2.18  | 3.84       |



272 x 150mm