


ZIMLED 1200, 930 (BBBL), SPOT, GREY

ITAB

- ✓ Diskret och prydligt tak
- ✓ Finns i olika färgtemperaturer
- ✓ Verktygsfri installation
- ✓ Tillgänglig i vitt, svart och grått
- ✓ Enkel att justera

TECHNICAL SPECIFICATION

| | |
|------------------------------|-----------------------|
| Product Code | 303-500-30 |
| Colour | Grey |
| Control | On/off |
| CRI light colour | 930 (BBBL) |
| Delivered lumen output lm | 1150 |
| Driver | Stand alone, included |
| EEL | E |
| Light distribution | Spot |
| Lightsource | LED COB |
| Mains input voltage | 220-240 V |
| Measurements A | 118 |
| Measurements B | 56 |
| Measurements C | 61 |
| Mounting | Recessed |
| Position | 355°/80° |
| Lifetime | L80 B10, 50.000h |
| Protection | IP 20, class III |
| Sawing instructions diameter | 108 |
| Start Time | Instant |
| System power W | 11 |
| Unit | mm |
| Weight | 0,2 |

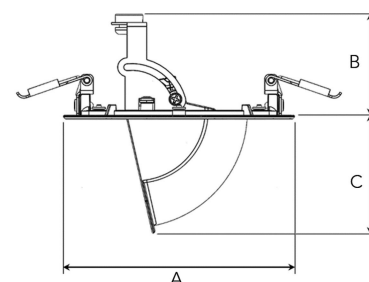

A= 118mm, B= 56mm, C= 61mm

| Spot | Medium | Flood | Wide Flood | |
|------|--------|-------|------------|------|
| 15° | 27° | 36° | 56° | |
| m | m | m | m | |
| o | o | o | o | |
| 1.0 | 0.26 | 0.47 | 0.65 | 1.06 |
| 2.0 | 0.53 | 0.95 | 1.30 | 2.12 |
| 3.0 | 0.79 | 1.42 | 1.95 | 3.18 |



108mm