


# ZIMLED 1200, 930 (BBL), WIDE FLOOD, GREY

ITAB

- ✓ Discreet and clean-looking ceiling
- ✓ Available in different colour temperatures
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Easy to adjust

## TECHNICAL SPECIFICATION

|                              |                       |
|------------------------------|-----------------------|
| Product Code                 | 303-503-30            |
| Colour                       | Grey                  |
| Control                      | On/off                |
| CRI light colour             | 930 (BBL)             |
| Delivered lumen output lm    | 1150                  |
| Driver                       | Stand alone, included |
| EEL                          | A+                    |
| Light distribution           | Wide flood            |
| Lightsource                  | LED COB               |
| Mains input voltage          | 220-240 V             |
| Measurements A               | 118                   |
| Measurements B               | 56                    |
| Measurements C               | 61                    |
| Mounting                     | Recessed              |
| Position                     | 355°/80°              |
| Lifetime                     | L80 B10, 50.000h      |
| Protection                   | IP 20, class III      |
| Sawing instructions diameter | 108                   |
| Start Time                   | Instant               |
| System power W               | 11                    |
| Unit                         | mm                    |
| Weight                       | 0,2                   |

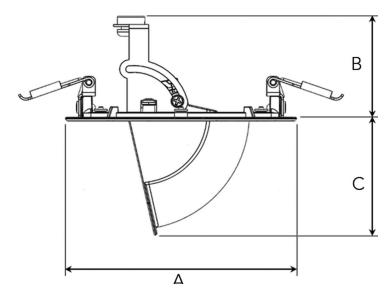

A= 118mm, B= 56mm, C= 61mm

| Spot |      | Medium |      | Flood |      | Wide Flood |      |
|------|------|--------|------|-------|------|------------|------|
| 15°  |      | 27°    |      | 36°   |      | 56°        |      |
| m    | ø    | m      | ø    | m     | ø    | m          | ø    |
| 1.0  | 0.26 | 1.0    | 0.47 | 1.0   | 0.65 | 1.0        | 1.06 |
| 2.0  | 0.53 | 2.0    | 0.95 | 2.0   | 1.30 | 2.0        | 2.12 |
| 3.0  | 0.79 | 3.0    | 1.42 | 3.0   | 1.95 | 3.0        | 3.18 |



108mm