


MOON MICRO 1200, 930 (BBL), MEDIUM, GREY

ITAB

- ✓ Discreet and clean-looking ceiling
- ✓ Available in various sizes and lumen packages
- ✓ Tool-free installation
- ✓ Available in white, black and grey
- ✓ Small, tiltable and rotating

TECHNICAL SPECIFICATION

Product Code	345-501-30
Colour	Grey
Control	On/off
CRI light colour	930 (BBL)
Delivered lumen output lm	1150
Driver	Stand alone, included
EEL	A+
Light distribution	Medium
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	87
Measurements B	54
Mounting	Recessed
Position	360°/35°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions diameter	81
Start Time	Instant
System power W	11
Unit	mm
Weight	0,25

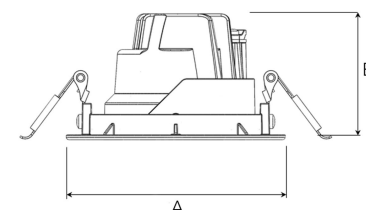

A= 87mm B= 54mm

Spot	Medium	Flood	Wide Flood
15°	27°	36°	56°
m	o	m	o
1.0	0.26	1.0	0.47
2.0	0.53	2.0	0.95
3.0	0.79	3.0	1.42
1.0	0.65	1.0	1.06
2.0	1.30	2.0	2.12
3.0	1.95	3.0	3.18



81mm

ITAB

Phone: +46 910 733 790
info@nordiclight.se

Please note that this product sheet is for a specific product and colour. The pictures may show examples of other available colours