


FLEX I 3000, 930 (BBL), SPOT, BLACK

ITAB

- ✓ Modernt, minimalistiskt och prydligt tak
- ✓ Finns i olika storlekar och lumenpaket
- ✓ Verktygsfri installation
- ✓ Tillgänglig i vitt, svart och grått
- ✓ Infälld och ställbar

TECHNICAL SPECIFICATION

Product Code	306-520-20
Colour	Black
Control	On/off
CRI light colour	930 (BBL)
Delivered lumen output lm	2700
Driver	Stand alone, included
EEL	A++
Light distribution	Spot
Lightsource	LED COB
Mains input voltage	220-240 V
Measurements A	202
Measurements B	179
Measurements C	202
Measurements D	70
Mounting	Recessed
Position	360°/60°
Lifetime	L80 B10, 50.000h
Protection	IP 20, class III
Sawing instructions x	177
Sawing instructions y	191
Start Time	Instant
System power W	22
Unit	mm
Weight	1.1

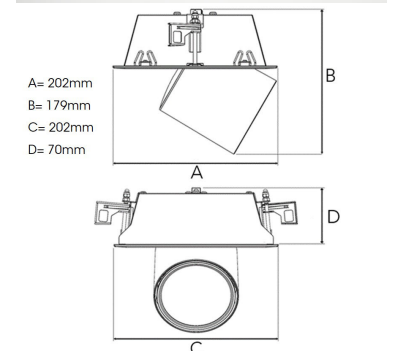

Spot		Medium		Flood		Wide Flood	
	14°		27°		38°		56°
m	ø	m	ø	m	ø	m	ø
1.0	0.25	1.0	0.48	1.0	0.69	1.0	1.07
2.0	0.49	2.0	0.95	2.0	1.39	2.0	2.14
3.0	0.74	3.0	1.43	3.0	2.08	3.0	3.22



177 x 191mm

ITAB

Phone: +46 910 733 790
info@nordiclight.se

Please note that this product sheet is for a specific product and colour. The pictures may show examples of other available colours